

# South

SOUTH BEACH

# beach



**AQM**  
American Quality Manufacturing, Inc.

*Connecting Business Partners To Healthy Lifestyle Products*



## STANDARD FEATURES

- 160W Reflector Lamps
- Powder Coated, Baked-on Finish
- Steel Welded Construction
- Staggered Lamp Configuration
- Wide, Easy Entry Door
- Two Stereo Speakers
- High-Tech Digital Timer With Hour/Session Counter
- High Reflective Chrome Wire Grids
- LED Courtesy Light
- Internal Emergency Button
- Easy Lamp Access. No Tools Required to Change Lamps
- External Ballast Tray. Makes Servicing and Assembly a Breeze
- Wireless T-Max Compatible
- Standard Three-Year Warranty on All Electrical Components
- Lifetime Warranty on Frame and 90-Day Labor Warranty
- Many Color Options Available



## New Card Reader Feature

Attention 24-hour fitness centers!  
With the swipe of a card, users can power up the timer and select their own exposure time. This feature is critical for unattended locations and reduces overexposure liability.

## THREE MODELS TO CHOOSE FROM:

### 48 South Beach

- 48-Reflector 160W
- 13 Min Max Exposure
- Advanced Cooling System
- After Tan Cooling System
- Single Phase, 220V 3 Wire Dedicated Circuit
- Single Phase, 60 Amp Breaker
- Single Phase. Draws 46 Amp
- Hard Wired. Does Not Come With a Plug or Power Cord
- For Optimal Efficiency We Recommend a Maximum Room Temperature of 75°F
- Recommended A/C Tonnage 1.25
- **Optional 3 Phase, 220VAC 4 Wire Dedicated Circuit**
- 3 Phase, 40 Amp Breaker
- 3 Phase Amp Draw 30 Amp

### 54 South Beach

- 54-Reflector 160W
- 12 Min Max Exposure
- Advanced Cooling System
- After Tan Cooling System
- Single Phase, 200V 3 Wire Dedicated Circuit
- Single Phase, 60 Amp Breaker
- Single Phase. Draws 52 Amp
- Hard Wired. Does Not Come With a Plug or Power Cord
- For Optimal Efficiency We Recommend a Maximum Room Temperature of 75°F
- Recommended A/C Tonnage 1.5
- **Optional 3 Phase, 220VAC 4 Wire Dedicated Circuit**
- 3 Phase, 40 Amp Breaker
- 3 Phase Amp Draw 33 Amp

### 60 South Beach

- 60-Reflector 160W
- 10 Min Max Exposure
- Advanced Cooling System
- After Tan Cooling System
- Single Phase, 220V 3 Wire Dedicated Circuit
- Single Phase, 70 Amp Breaker
- Single Phase. Draws 57 Amp
- Hard Wired. Does Not Come With a Plug or Power Cord
- For Optimal Efficiency We Recommend a Maximum Room Temperature of 75°F
- Recommended A/C Tonnage 1.75
- **Optional 3 Phase, 220 VAC 4 Wire Dedicated Circuit**
- 3 Phase, 50 Amp Breaker
- 3 Phase Amp Draw 36 Amp



## OPTIONAL FEATURES:

### 1. Corporate Branding for Franchises

We can custom build the tanning equipment to match your corporate colors and place your trademark logo on the door.

### 2. Exhaust System Enclosure

### 3. Wireless Communication

This eliminates the need for an electrician to run the communication cord from the front room controller to the tanning booth.

### 4. Neon Accent Lighting

### 5. Special Low Profile Ceiling

This ceiling was designed for locations with exhaust-capable ceilings of less than eight feet.

### 6. Acrylic Lamp Covers


### 7. South Beach Door Graphic




## Ventilation Information

Air from the room is used to cool the unit. Maximum ambient room temperature should be 75°F. It is recommended that you place your unit no closer than 6" from any wall. Make sure nothing obstructs the airflow into or out of the fan openings. A poorly ventilated room may cause the unit to become HOT and cause discomfort to the user.

**WALLS STOP 1 to 2 FEET FROM CEILING**  
If not, install ceiling exhaust fans or external vents for each room

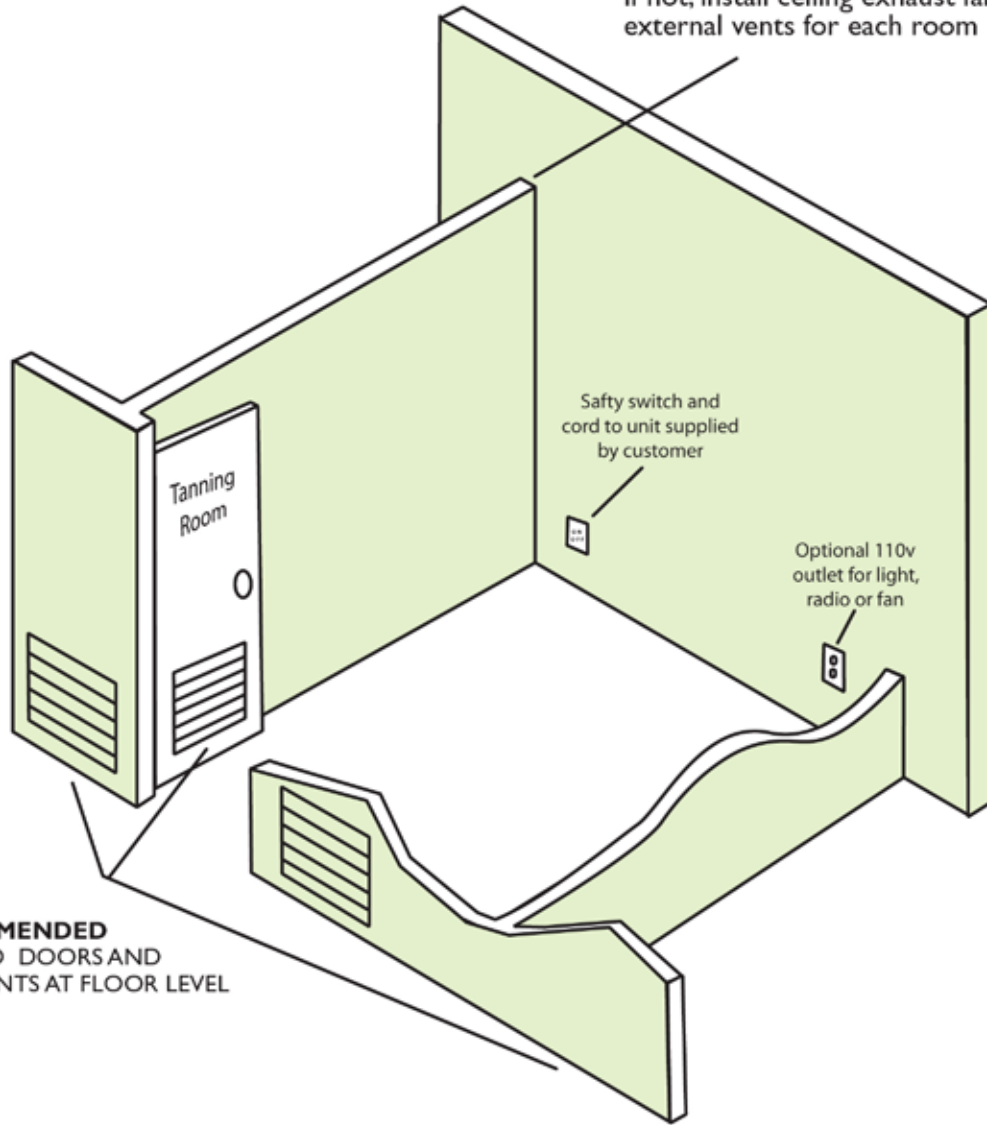

**RECOMMENDED**  
LOVERED DOORS AND  
WALL VENTS AT FLOOR LEVEL

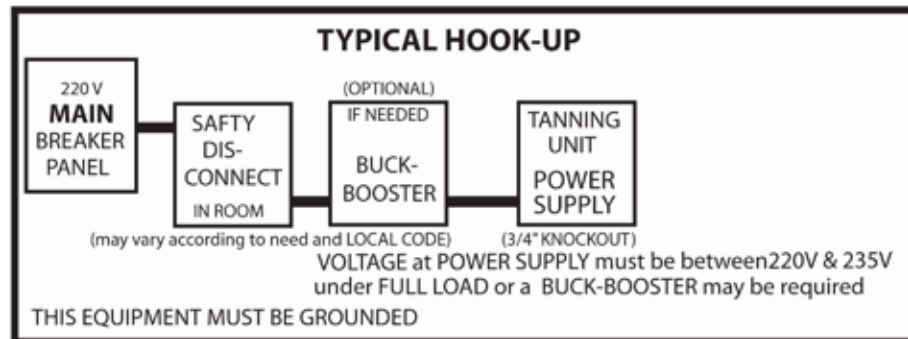


## RECOMMENDED ROOM SIZES


**STANDARD COOLING:**  
7' X 6' X 102" High



**LOW PROFILE EXHAUST:**  
7' X 6' X 95.5" High

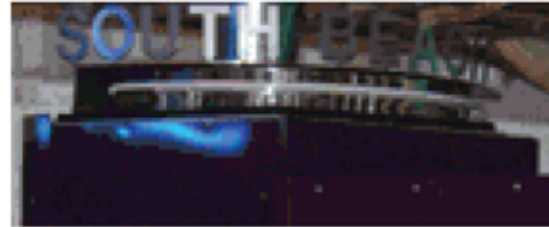


**EXHAUST ENCLOSURE:**  
7' X 6' X 105.5" High

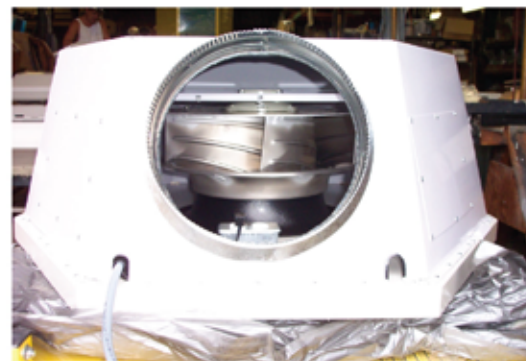


## NOTICE

To maintain your T-Max warranty use only approved modular cables or wireless modules, available from T-Max or AQM Inc.


Overall Size with power supply on Side.  
42" Deep (Door Closed) x 56" Wide  
66" Deep (Door Open) x 56" Wide

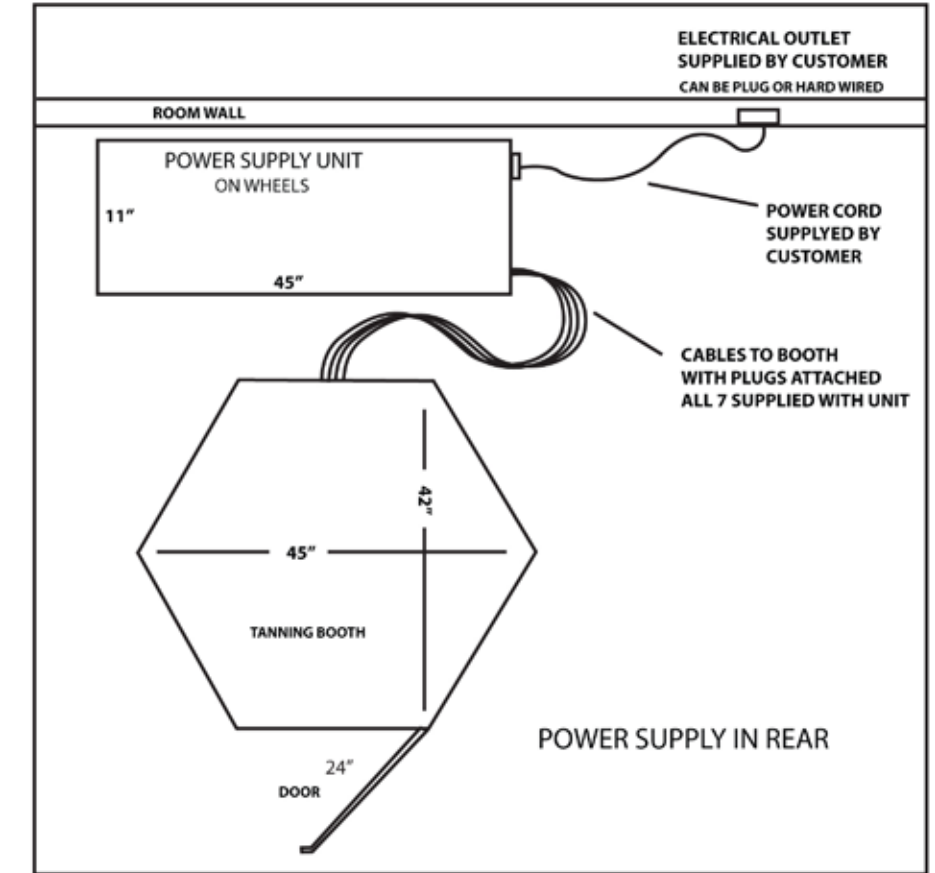


Overall Size with power supply in Rear.  
55" Deep (Door Closed) x 45" Wide  
79" Deep (Door Open) x 45" Wide

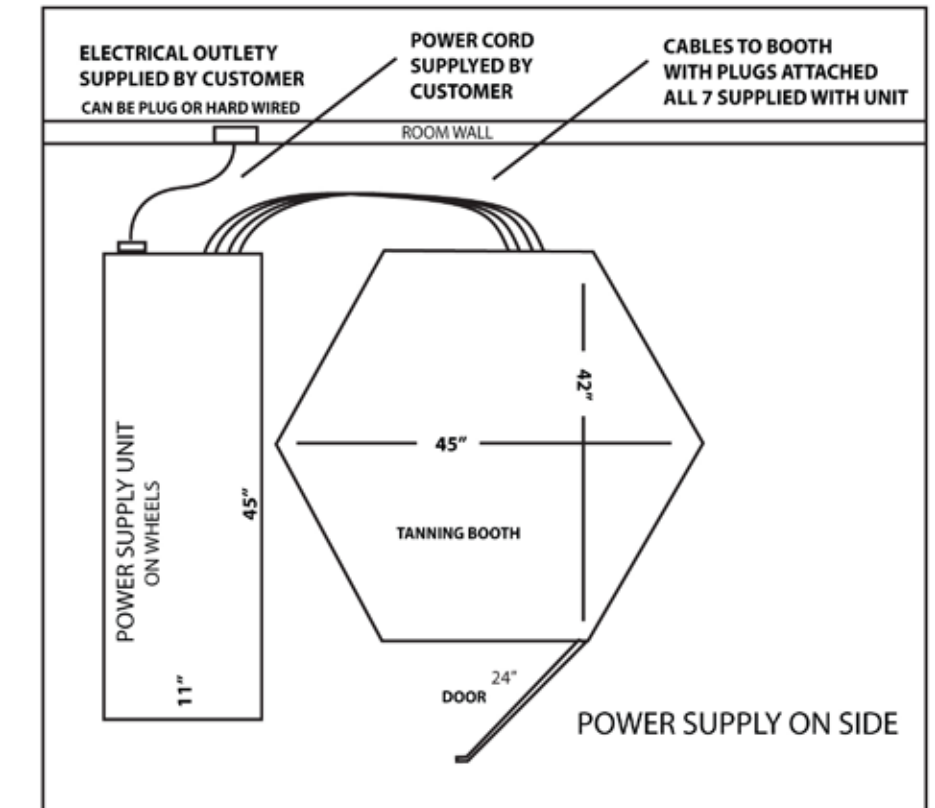

# DRESSING ROOM SPEC SHEET

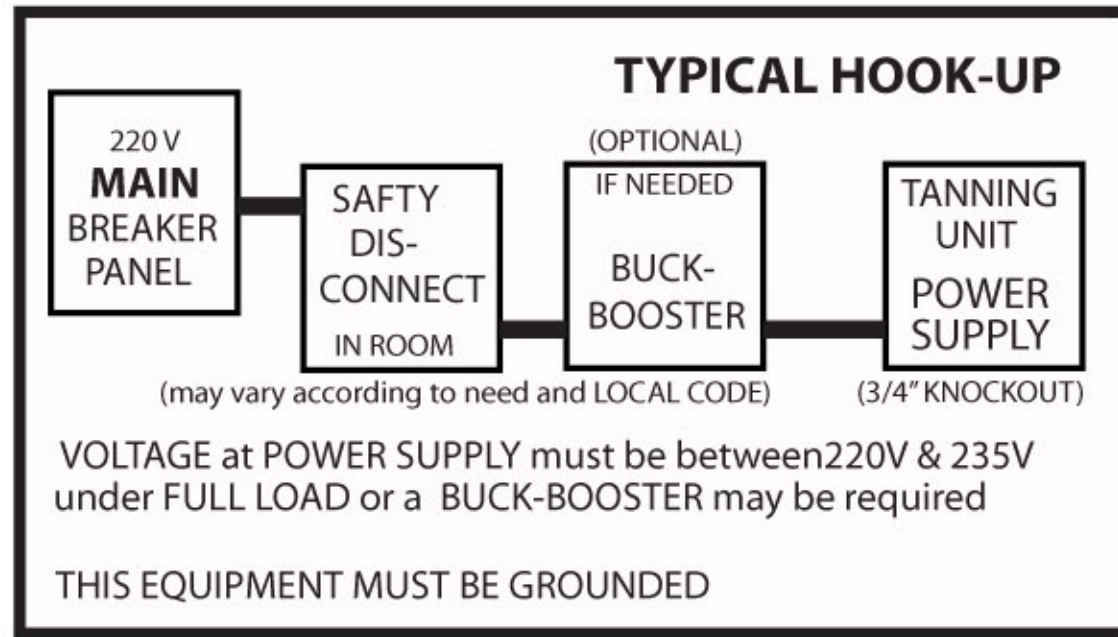

EXHAUST ENCLOSURE:  
105.5" High

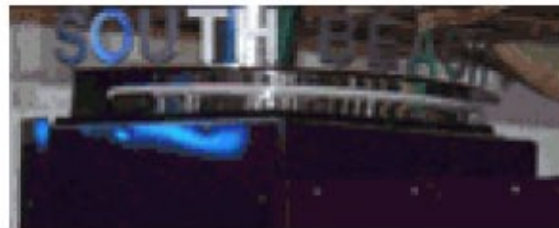


LOW PROFILE EXHAUST:  
95.5" High








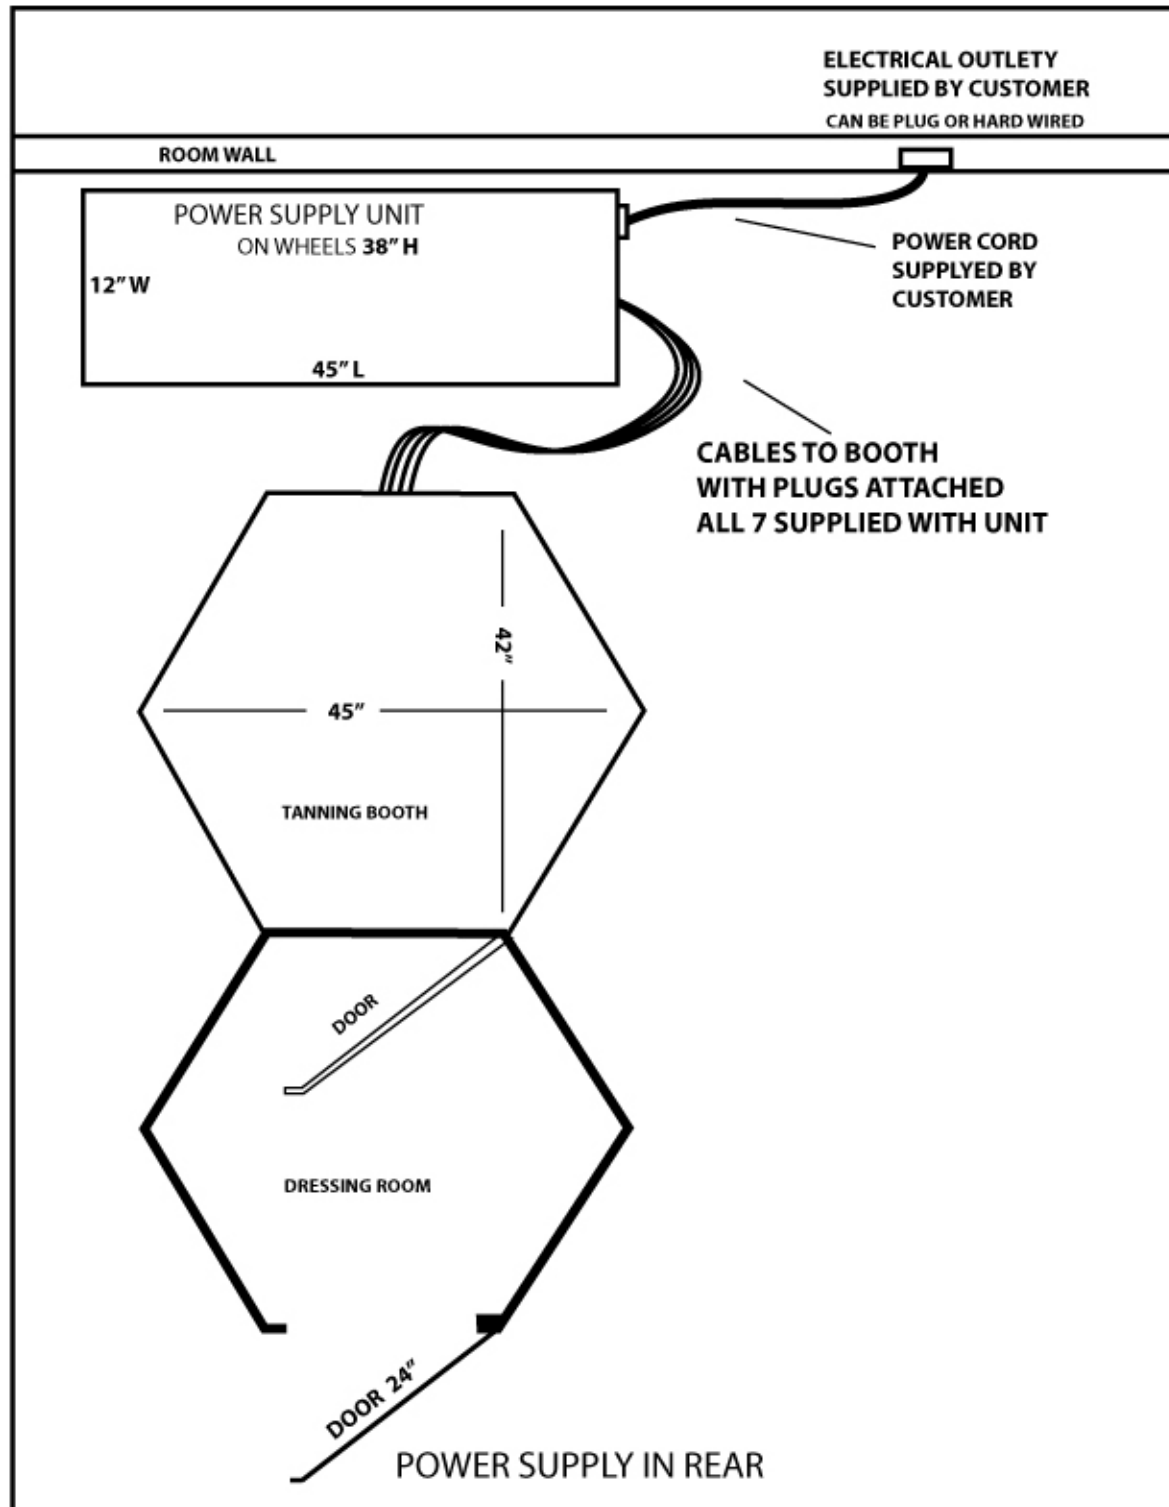



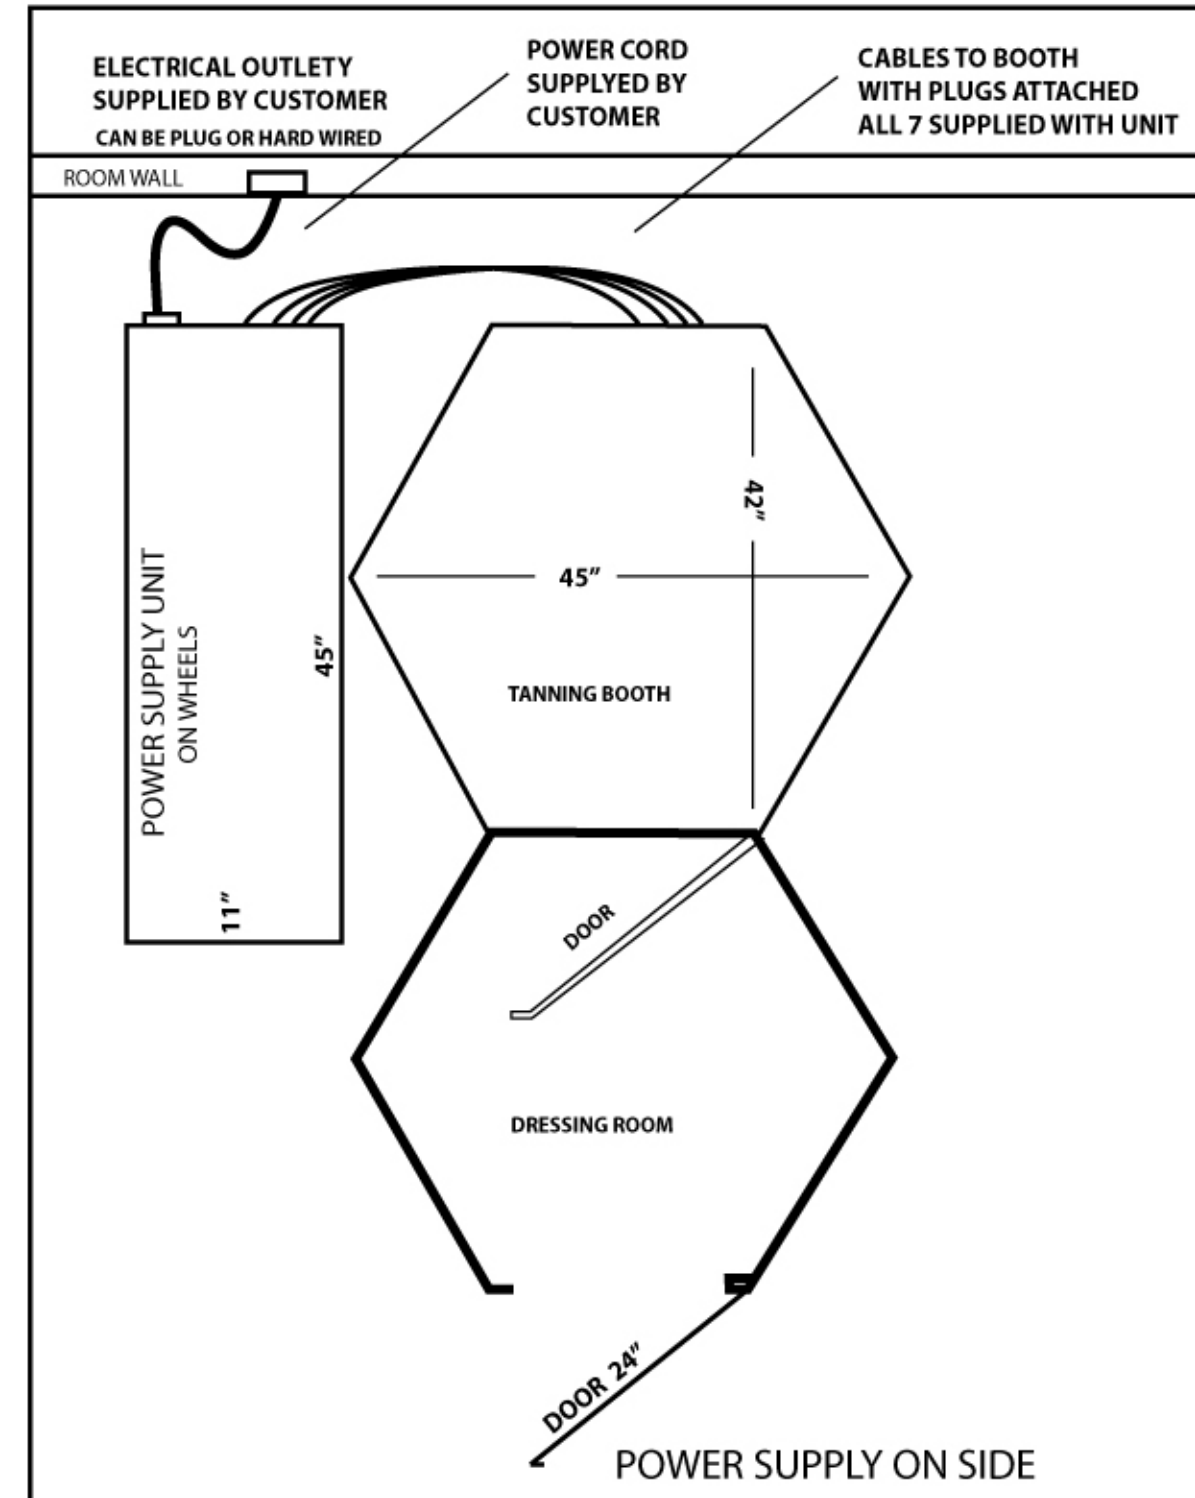





















DRESSING ROOM  
WITH STANDARD EXHAUST FAN 102" High

**\* OVERALL SIZE WITH POWER SUPPLY IN REAR:  
95" DEEP (Door Closed) X 45" WIDE  
119" DEEP (Door Open) x 45" WIDE**



**\* OVERALL SIZE WITH POWER SUPPLY ON SIDE:  
82" DEEP (Door Closed) X 58" WIDE  
106" DEEP (Door Open) x 58" WIDE**



				
9910-9035 Crystal White	9910-9897 Sky White II	9930-9789 TGIC Mende White II	9910-9741 Brite White	9610-9021 Pompano White
				
9910-1045 Pasta	9810-1048 Sandlewood	9810-1049 Mesa Tan	9810-7042 Electric Grey/ASA 70	9900-7111 Win Grey
				
9610-7040 Storm Grey	9810-1070 Golden Yellow	9810-1268 Safety Yellow	9810-2113 Sonny Orange II	9910-2352 October Orange
				
9810-3042 Ruby Red	9910-3921 Chili Pepper	9910-3922 Crimson	9810-6046 Ivy Green	9910-5067 Azure Blue
				
9810-5413 Bahama Blue Poly	9910-5054 Ocean Blue	9910-8036 Dark Sienna	9022-71127 RAL 7021 Poly Tex	9030-90922 SD Flat Black
				
9510-9000 Mineral Black	9710-9000 Cargo Black	9900-9000 Jet Black	9910-9000 Shuttle Black	9310-90278 Satin Black Polyester

# South Beach Custom Colors